

## ARPRO Black <100 g/l

Grade	Description	Weight (mg)	ARPRO Size (mm)	ARPRO	Bulk Density (g/l)	Packaging
5116	Black	1.20	3.5 – 6.0	●	16	Bulk/Bag
5118	Black	1.20	3.5 – 5.5	●	18	Bulk/Bag
5122	Black	1.20	3.0 – 5.0	●	22	Bulk/Bag
5126	Black	1.20	3.0 – 4.5	●	26	Bulk/Bag
5130	Black	1.20	2.5 – 4.5	●	30	Bulk/Bag
5135	Black	1.20	2.5 – 4.5	●	35	Bulk/Bag
5142	Black	1.20	2.5 – 4.0	●	42	Bulk/Bag
5150	Black	1.65	2.5 – 4.0	●	50	Bulk/Bag
5155	Black	1.65	2.5 – 4.0	●	55	Bulk/Bag
5160	Black	1.65	2.0 – 4.0	●	60	Bulk/Bag
5170	Black	1.65	2.0 – 4.0	●	70	Bulk/Bag
5180	Black	1.65	2.0 – 4.0	●	80	Bag
5195	Black	1.65	2.0 – 3.5	●	95	Bag

## ARPRO Black >100 g/l

5912	Black	2.00	2.0 – 3.5	●	120	Bag
5915	Black	2.00	1.5 – 3.5	●	150	Bag
5920	Black	2.00	1.5 – 3.0	●	200	Bag

## ARPRO Grey <100 g/l

4133	Grey	1.20	2.0 – 4.5	●	33	Bulk/Bag
------	------	------	-----------	---	----	----------

## ARPRO White <100 g/l

3115	White	1.20	3.5 – 6.0	○	15	Bulk/Bag
3122	White	1.20	3.0 – 5.0	○	22	Bulk/Bag
3133	White	1.20	2.5 – 4.5	○	33	Bulk/Bag
3150	White	1.20	2.5 – 3.5	○	50	Bulk/Bag
3170	White	2.00	2.5 – 4.0	○	70	Bag

## ARPRO Application specific

Grade	Description	Weight (mg)	ARPRO Size (mm)	ARPRO	Bulk Density (g/l)	Packaging
4135 FR	Flame retardant	0.80	2.5 – 4.0	●	35	Bag
5135 ESDP	Electrostatic discharge protection $\leq 10^7 \Omega$	1.20	2.5 – 4.5	●	35	Bulk/Bag
5135 LSS	Low stick / slip	0.80	2.5 – 4.0	●	35	Bulk/Bag
5135 RE	Recycled	1.20	2.5 – 4.5	●	35	Bulk/Bag
5635 CG	Complex geometry	0.50	2.0 – 3.5	●	35	Bulk/Bag

## ARPRO On-site expansion


5253	Expandable to 16 g/l	1.00	2.0 – 3.5	●	53	Bulk
5275	Expandable to 16 g/l	1.00	2.0 – 3.5	●	75	Bulk

## ARPRO Porous

4025	Grey	1.50	2.0 – 6.0	○	25	Bulk/Bag
4036	Grey	1.50	2.0 – 5.0	○	36	Bulk/Bag

## ARPRO Colours

1133	Blueberry	1.20	2.0 - 4.5	●	33	Bag
1133	Dragon fruit	1.20	2.0 - 4.5	●	33	Bag
1133	Orange	1.20	2.0 - 4.5	●	33	Bag
1133	Lemon	1.20	2.0 - 4.5	●	33	Bag
1133	Lime	1.20	2.0 - 4.5	●	33	Bag

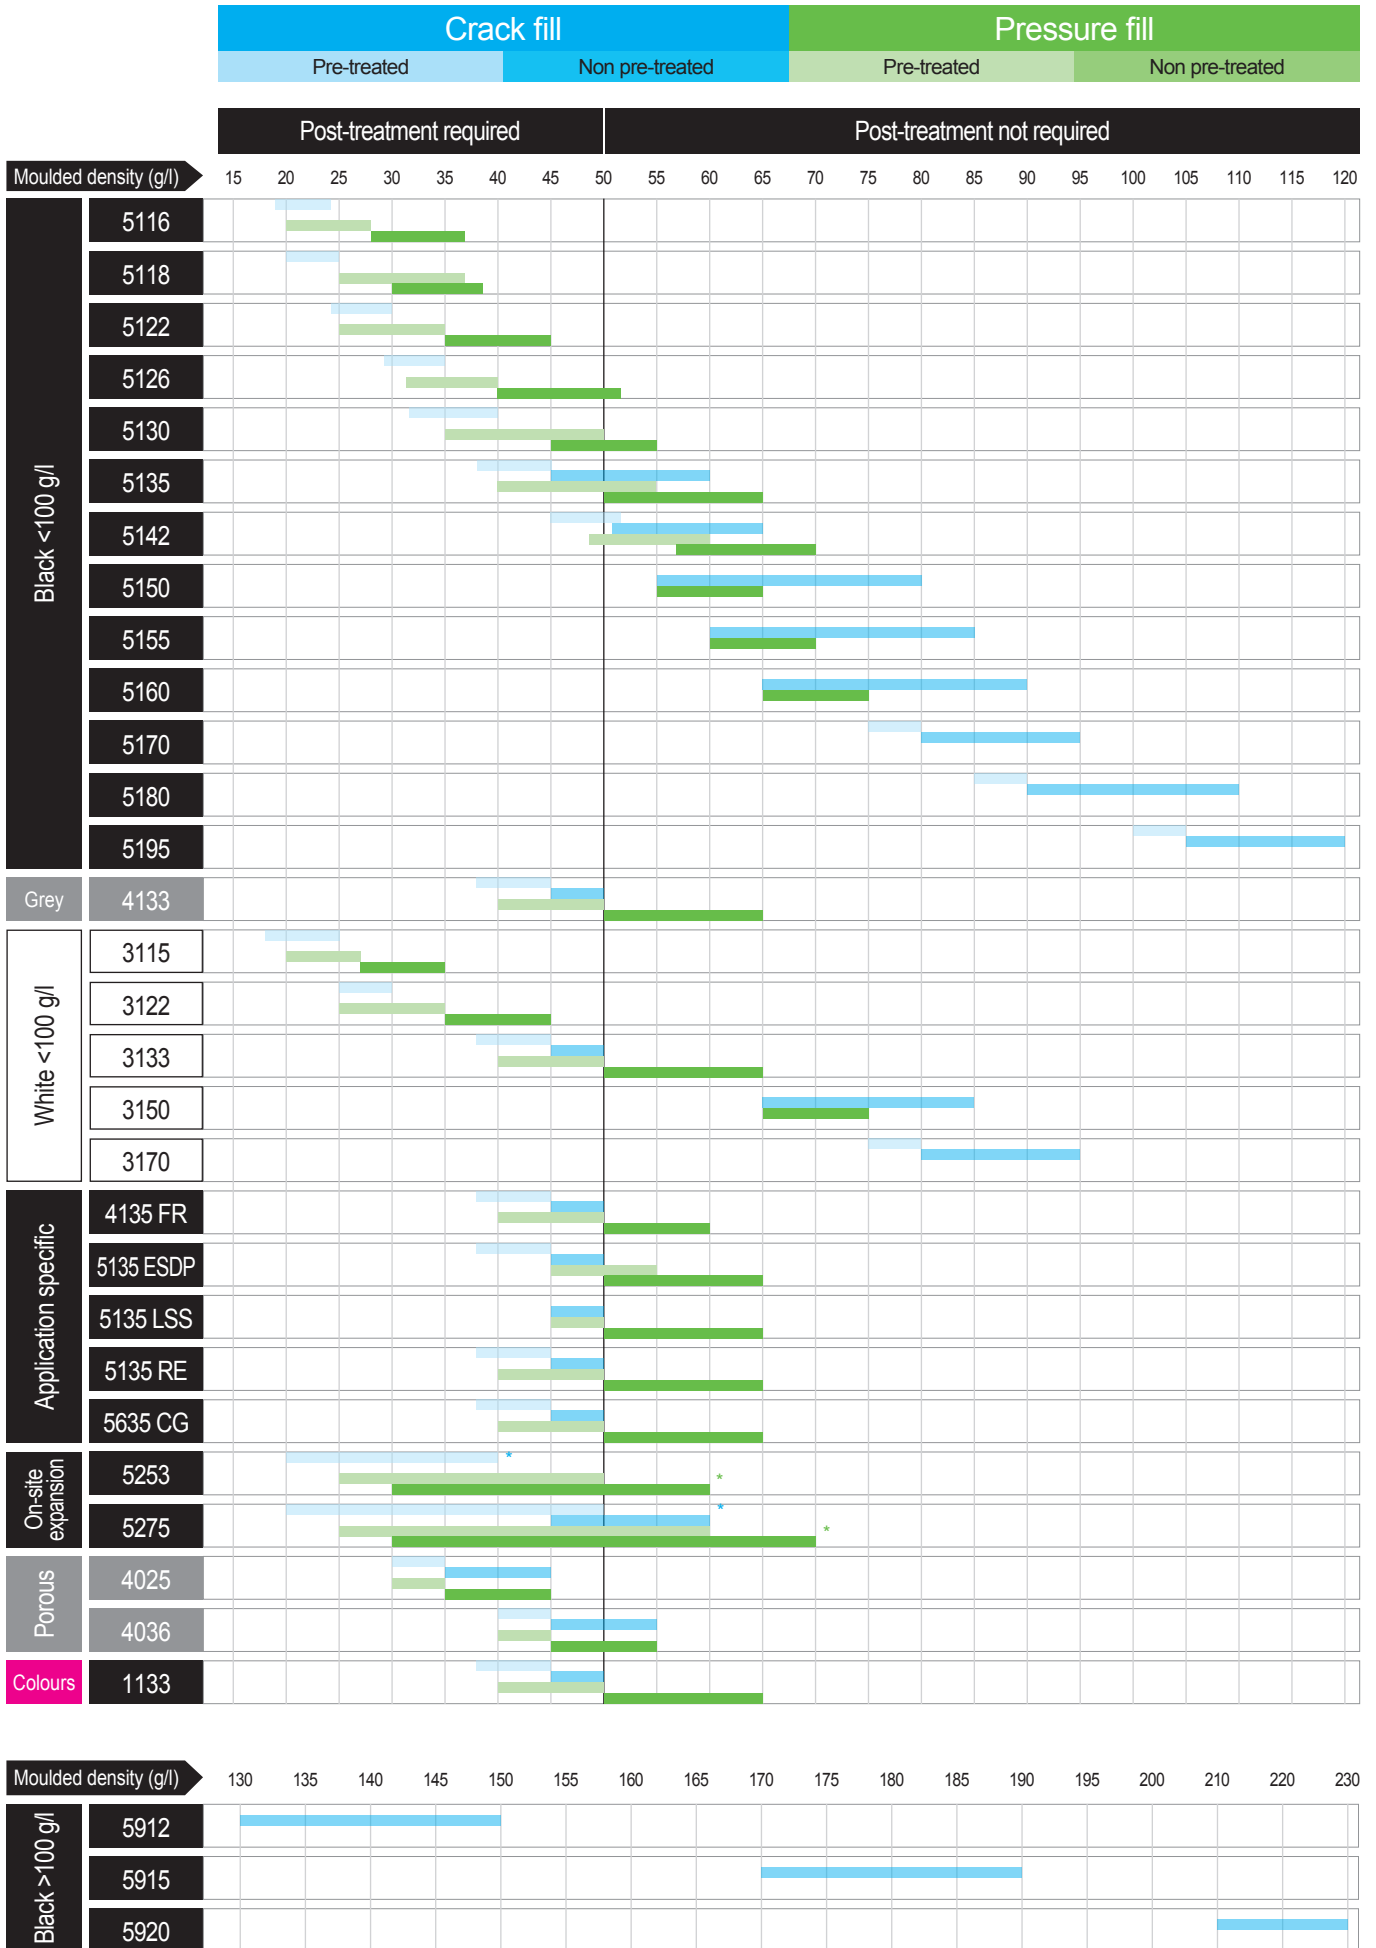

\*ARPRO 5253 and 5275 require further expansion on site, prior to moulding. Achievable density range depends on pressurisation and process.