





Density vs. Static Compressive Strength Curve at 25%, 50% and 75% Strain (density range from 25 g/l to 225 g/l) Molded from ARPRO[®] Expanded Polypropylene (EPP)

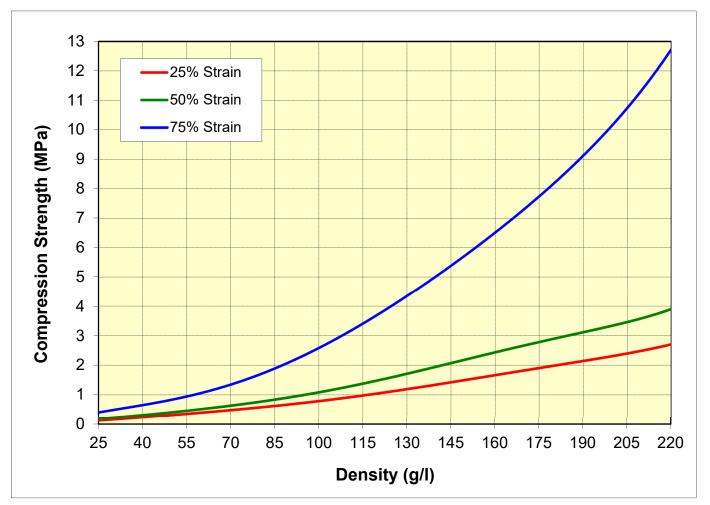



ARPRO[®] is a registered trademark of JSP International Group, Ltd. PUBLICATION JSP-CompStren25%50%75%-EPP-2018

The information contained herein is based upon the results of limited laboratory tests on test samples of material molded from expanded polyolefin resin manufactured by JSP International. There can be no assurance that the similar results will be achieved in simulated tests or actual use of commercial product molded by usubmers of JSP International. Product performance may vary substantially depending upon the particular application or processing involved. The listed properties are likustrative only and not the product specifications. All suggestions and recommendations are many warys. Consequently, processors and/or users are advised that there may be a need to conduct independent lests and experiments in order for them to determine the extent to which they may choose to rely upon such information interses operational disclaims any liability in connection with the use of the information and does not warrant against infringement by reasons of the use of its products in combination with other material or in any process.

