

Product description

Colour	Weight (mg)	Size (mm)	Bulk density (g/l)	Packaging	Food approved
Grey	1.5	2.0 - 5.0	34.0 - 38.0	Bulk / Bag	Yes


Physical properties

	Test method	40g/l	50g/l
Compressive strength 25% strain (kPa) 50% strain (kPa) 75% strain (kPa)	ISO 844 5mm/min	190 285 600	260 375 785
Compression set 25% strain – 22 hours – 23°C (%)	ISO 1856 C Stabilising 24h	9.0	9.0
Burn rate (mm/min)	ISO 3795 12.5mm thick	50	40
Acoustic absorption coefficient	ISO 354 1,250Hz 30mm	0.72	0.86

ARPRO 4036 has a porosity that absorbs sound from 400 to 10,000Hz and allows water and liquids of similar viscosity to pass through.

Moulding

ARPRO 4036 can be moulded using Crack Fill (CF) and Pressure Fill (PF) with Pre-Treated (PT) or Non-Pre-Treated (NPT) ARPRO in both processes.

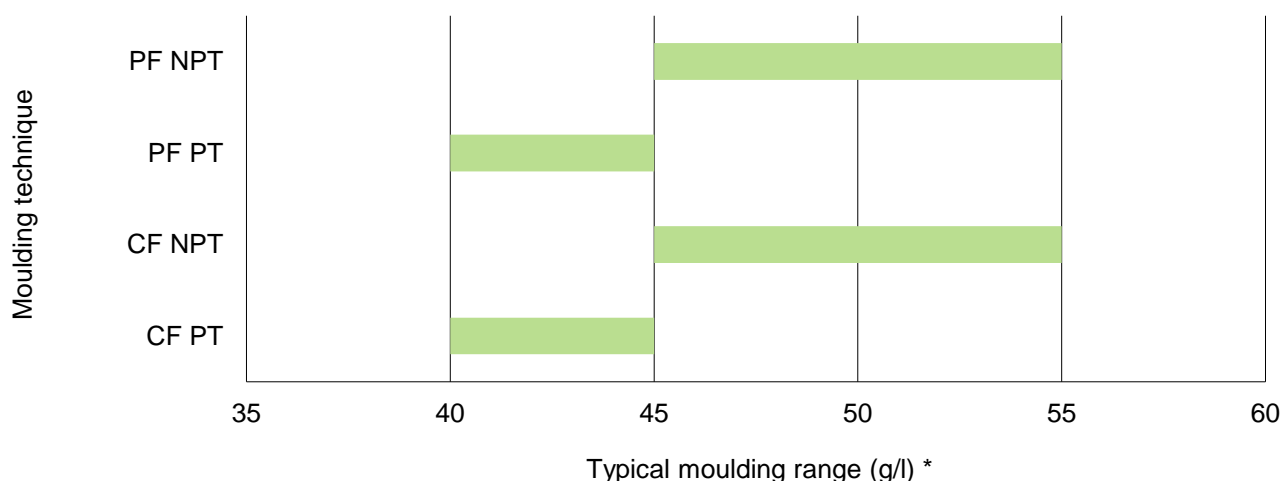


* Shrinkage, surface aspect and cycle time are influenced by process parameters, tool and equipment layout, and part geometry.

Pre-treatment

Suggested pre-treatment cycle with compressed air at 23°C:

5 hours up to 1 bar, decrease and maintain at 0.7 bar throughout production.

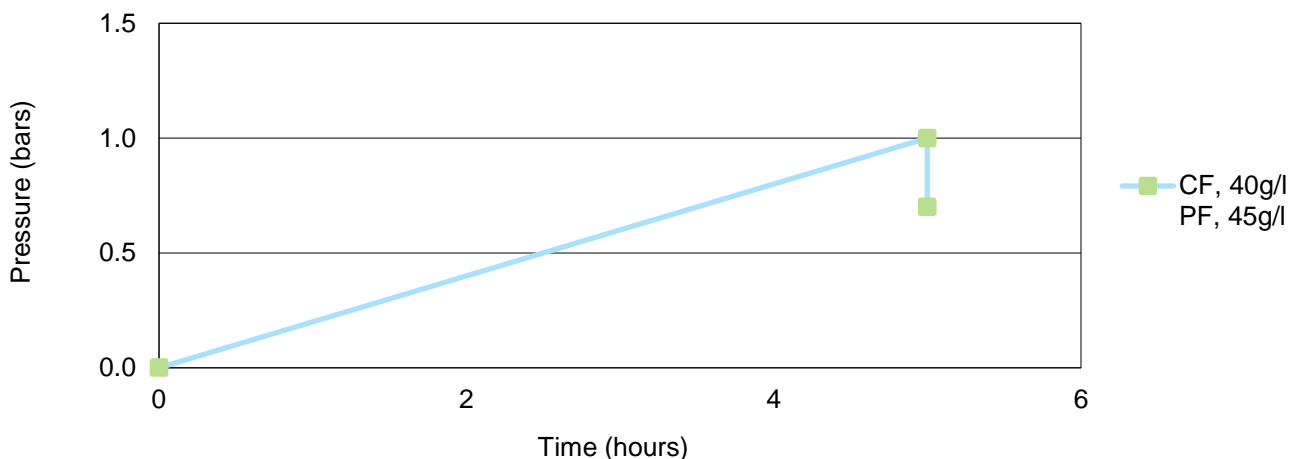

Processing

Cycle can be adapted according to moulding process, density and part geometry:

If internal cell pressure is too high, this may lead to fusion issues. In this case, decrease time, pressure or temperature to improve fusion.

Increase time, pressure or temperature to reduce moulded density and improve aspect.

Operating the pressure tank above ambient temperature, up to a maximum of 50°C, significantly shortens pre-treatment time.

Post-treatment

For moulded densities below 50g/l and depending on the parts dimensions, post-treatment at a temperature of 80°C is recommended for 3 to 8 hours. This helps to remove water content, as well as ensuring dimensional stability and a geometric shape.

Shrinkage

Typical values range from 1.8% to 2.5%. The higher the moulded density, typically the lower the shrinkage.

Storage

Temperature: >15°C

Indoor storage strongly recommended.

If stored outdoors, it is strongly recommended to keep the material indoors for 24 hours before moulding.